

# MAXILUBE®

## HEAVY DUTY AIR OPERATED GREASE PUMP



The P58 Maxilube is the latest high-performing heavy duty air operated grease pump manufactured by Macnaught. Designed, engineered and manufactured by Macnaught in Australia, the P58 now provides you with a high-performing, high-pressure grease pump along with the Macnaught performance reliability and service.

### 58:1 Ratio Grease Pump

### Heavy-duty construction

Reliable long service life in the harshest of conditions

### High-flow up to 6kg/min (free flow)

Fast high pressure greasing

### High quality components

To ensure reliable operation in the harshest environments

### Large silencer

Designed to prevent icing and reduce noise

### Fast grease line pressure recovery

Instant greasing

### Large capacity suitable for long grease line delivery


Ideal for large workshops with long greasing distances

### Fully Repairable


Spare parts availability



Output pressure vs flow output

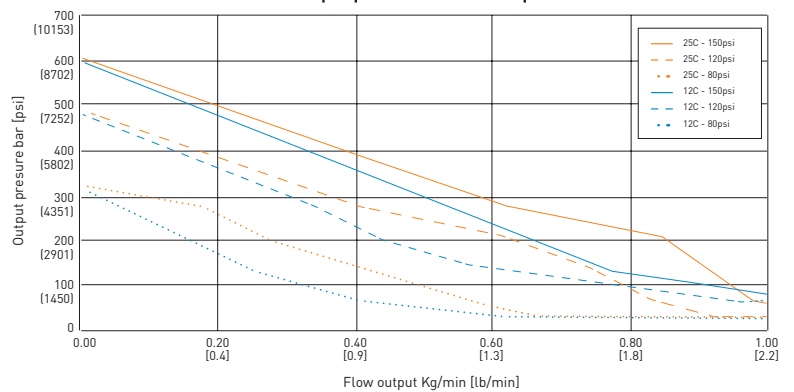

Air consumption vs flow output

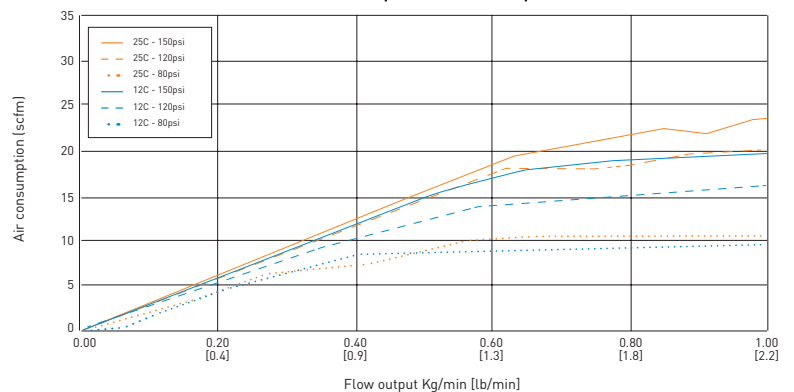

### P58-01

#### P58 MAXILUBE® Heavy Duty Air Operated Grease Pump

### SERVICE PARTS

- P58-1K: Air Motor Overhaul Kit
- P58-3K: Seal Kit
- P58-2K: Lower Pump Service Kit

### APPLICATIONS

- For use in installations where long distance high pressure greasing is required

SCAN FOR MORE INFORMATION



# MAXILUBE®

## HEAVY DUTY AIR OPERATED GREASE PUMP

**10**  
YEARS  
MACNAUGHT  
WARRANTY



Accessories	
Lid & Follower Plate - 180 Kgs	P58LF-01
Pipe Adaptor Kit	TA-2K
Airline Oil Lubricator Kit	TA-3K
Air Filter and Regulator Kit	TA-7K
Grease hose - 2.5m	PF8
Grease hose - 4m (optional)	PF6
Booster Gun	B2-01
Graco to Macnaught adaptor	TJ061A
3" Camlock Adapter Kit	TJ062A



P58-01



P58PLF-01



P58PGLF-01

Part Number	P58-01	P58PLF-01	P58PGLF-01
Description	P58 Grease Pump - 180 Kgs	P58 Grease Pump Kit- with Lid and Follower - 180 Kgs	P58 Grease Pump Kit - with Booster Gun, Lid and Follower - 180 Kgs
Pressure Ratio	<b>58:1</b>	<b>58:1</b>	<b>58:1</b>
Air Pressure Operating Range	60 to 150 psi	60 to 150 psi	60 to 150 psi
Air Consumption	23.5 SCFM (@120 psi pressure, 20°C)	23.5 SCFM (@120 psi pressure, 20°C)	23.5 SCFM (@120 psi pressure, 20°C)
Max Fluid Outlet Pressure	8700 psi (59, 900 kPa)	8700 psi (59, 900 kPa)	8700 psi (59, 900 kPa)
Air Motor Diameter	4.1" (104.7mm)	4.1" (104.7mm)	4.1" (104.7mm)
Max free Flow Delivery Rate	6 kg/min (13lb/min) (@120 psi pressure, 20°C)	6 kg/min (13lb/min) (@120 psi pressure, 20°C)	6 kg/min (13lb/min) (@120 psi pressure, 20°C)
Air Inlet Size	1/4" BSPT	1/4" BSPT	1/4" BSPT
Fluid Outlet Size	3/8" BSPT	3/8" BSPT	3/8" BSPT
Wetted and Seal Materials	NBR	NBR	NBR
Noise Level	85 dB(A) (@120 psi)	85 dB(A) (@120 psi)	85 dB(A) (@120 psi)
Air Lubricator Included	Yes	Yes	Yes
Hose	X	X	2.5m x 6mm ID Delivery Hose
Control Gun	X	X	B2 Booster Gun with Z Swivel
Lid and Follower (180 Kgs)	X	Lid and Follower - 180 Kgs (P58LF-01)	Lid and Follower - 180 Kgs (P58LF-01)
Grease up to	NLGI no 2	NLGI no 2	NLGI no 2
Pump Tube Diameter	41.3 mm O.D.	41.3 mm O.D.	41.3 mm O.D.
Pump tube height	960 mm	960 mm	960 mm
Total height	1396 mm	1396 mm	1396 mm
Weight	13 Kgs	24.4 Kgs	25.5 Kgs